

Electrical Specifications:

Clamp Voltage: +/-7.5 Volts
(common and differential) modes

Protecting: Pins 1,2,7,8

Maximum repetitive self-reset surge:


3700 Volts using 2 Ohm source
per: EN61000-4-5 Specification.

Maximum fail safe surge:

6600 Volts for 100 pulses using 2 Ohm
source per EN61000-4-5 Specification.
Exceeds EN6100-4-5, levels 4 and 6X

Enclosure:





Grey, powder coated steel, snap together.

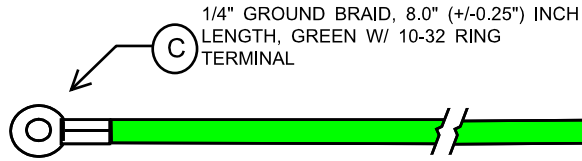

MOUNTING OPTIONS:

1) FOUR 6-32 THREADED HOLES
AVAILABLE ON BOTTOM OF
ENCLOSURE. SEE DRAWING 20-147-
10M FOR DETAILS.

2) OPTIONAL DIN RAIL MOUNTING CLIP
AVAILABLE

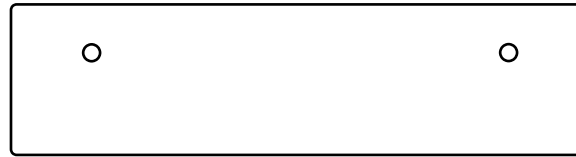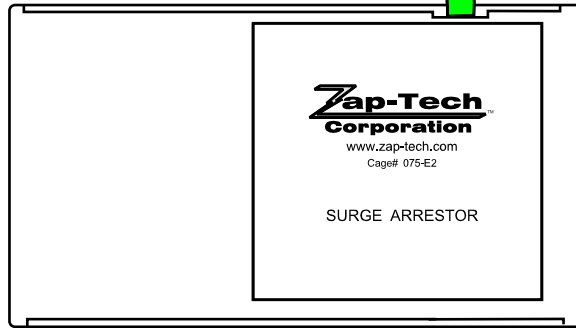

ITEM	DESCRIPTION	QTY.
A	ZAPTECH PROTECTOR MODULE	1

FINAL PACKAGING REQUIREMENT:
SEALED POLY BAG

Zap-Tech Corporation Proprietary
The Information, concepts and designs contained on this document are the intellectual property of Zap-Tech Corporation. Any unauthorized use or disclosure of this information without written permission from Zap-Tech Corporation will be considered a breach of confidentiality and a violation of Zap-Tech Corporation's intellectual property. COPYRIGHT 2004 ZAPTECH CORPORATION ALL RIGHTS RESERVED

<p>P.O.Box 17078 Reno, NV, USA 89511 888-727-1951 Fax: 775-227-7722</p>			TITLE: SURGE ARRESTOR	
			SIZE	PART NUMBER 20-147-200
DATE 10-10-2012		DRAWN BY		