


3951D Low Noise Embedded GPS Antenna

The 3951D Embedded GPS Antenna has one of the industry's lowest noise figure. It features a tuned custom ceramic patch element that minimizes detuning effects caused by adjacent objects. It also features ESD circuit protection, an innovative LNA (low noise amplifier) and a high rejection SAW filter which enable a consistent, clear signal while minimizing loss-of-lock even when GPS conditions are less than ideal.

Features

- 28 dB gain @ 3.3 VDC
- 15 KV ESD circuit protection
- Low noise figure: 0.5 dB LNA
- Excellent out-of-band signal rejection
- RoHS compliant

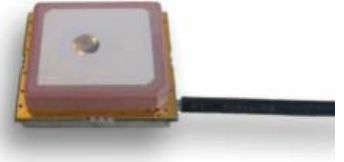

RF/Electrical Specifications

Center Frequency	Gain	Polarization	Current Draw
1575.42MHz \pm 10 MHz	3 dBic @ 90° -2.0 dBic @ 20°	Right Hand Circular	7.5 mA @ 3.3VDC (typical)


Mechanical Specifications

Antenna Dimensions	Weight	Shock	Vibration
1.1" x 1.1" x .3" (28.4 x 28.3 x 7.7 mm)	16 g (.56 oz)	Vertical axis 50G, other axes 30G	3 axis, sweep = 15 min 10 - 200 Hz log sweep: 3G
Cable		Connector	
6" (15 cm) RG174		MCX right angle	

Environmental Specifications

Temperature Range	Humidity
-40°C to +85°C operating	95% max (non condensing)

Out-of-band Filter Rejection Chart

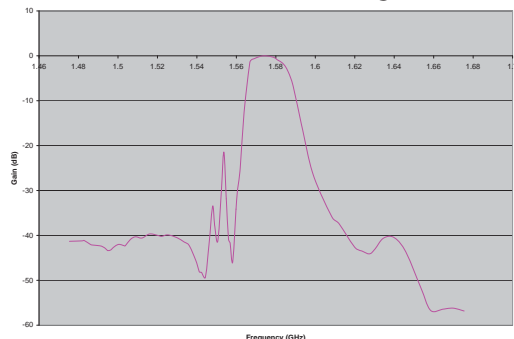

Product specifications are subject to change without notice.



Low Noise Amplifier Specifications

Nominal Impedance: 50 Ohm
VSWR: 1.5:1 max (at connector)
Nominal Gain: @ 3.3VDC: 28 dB (typical) @ 5VDC: 30 dB (typical)
Noise Figure: 0.5 dB (typical) LNA
Voltage: 2.7 - 5.0 VDC